



OIL FREE PRODUCTS

2 – 30,000 HP / 15 – 725 PSI



OIL FREE SCROLL



SRL SERIES — SIMPLEX

Flow: 6 – 21 cfm
Pressure: 120 – 145 psig



SRL SERIES — MULTIPLEX

Flow: 30 – 129 cfm
Pressure: 122 – 145 psig

OIL FREE SCREW



DSP SERIES / 30 – 300 hp

Flow: 117 – 1303 cfm
Pressure: 125 psig



DS13 / 100 – 200 hp

Flow: 427 – 801 cfm
Pressure: 100 – 150 psig



DR13 / 100 – 200 hp

Flow: 428 – 785 cfm
Pressure: 125 psig



OFD1550 / 550 hp

Flow: 1550 cfm
Pressure: 125 psig

OIL FREE CENTRIFUGAL

T2 / 175 – 300 hp

Flow: 550 – 1645 cfm
Pressure: 60 – 130 psig




TX / 325 – 535 hp

Flow: 1050 – 2470 cfm
Pressure: 60 – 145 psig



TRA / 275 – 675 hp

Flow: 1175 – 2900 cfm
Pressure: 60 – 160 psig




TRE / 500 – 1250 hp

Flow: 2000 – 6200 cfm
Pressure: 30 – 230 psig



T3 / 1000 – 1750 hp

Flow: 4800 – 8000 cfm
Pressure: 30 – 215 psig




TRX / 900 – 2300 hp

Flow: 5300 – 11,750 cfm
Pressure: 60 – 145 psig



f / 1340 – 30,000 hp

Flow: 1200 – 118,000 cfm
Pressure: 15 – 725 psig



For more information, contact OilFree@Sullair.com



DRYERS



REFRIGERATED AIR DRYERS

Cycling; Non-Cycling; High Temperature

Flow: 10 – 10,000 cfm



HEAT OF COMPRESSION

Flow: 1000 – 30,000 cfm




DESICCANT DRYERS

Modular; Heatless; Externally Heated; Blower Purge

Flow: 3 – 10,000 cfm

ISO 8573-1 CLASS ZERO CERTIFICATION

Under the ISO 8573-1 Class Zero classification, Sullair compressors are designed to operate oil free, minimizing the risk of contaminating the process air or gas. Class 0 Air is very important for applications where air purity is essential, including pharmaceuticals, food and beverages, electronics, automotive painting and textiles.

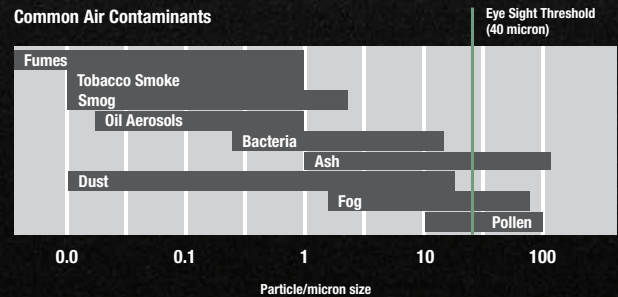

Class	Solid Particle Maximum number of particles per m ³			Pressure Dew Point °F (°C)	Oil (incl. vapor) mg/m ³
	0.1–0.5 micron	0.5–1.0 micron	1.0–5.0 micron		
0	As specified by the end-user or manufacturer, and more stringent than Class 1				
1	≤ 20,000	≤ 400	≤ 10	≤ -94° (-70°)	0.01
2	≤ 400,000	≤ 6,000	≤ 100	≤ -40° (-40°)	0.10
3	—	≤ 90,000	≤ 1,000	≤ -4° (-20°)	1.00
4	—	—	≤ 10,000	≤ 37.4° (3°)	5.00
5	—	—	≤ 100,000	≤ 44.6° (7°)	—
6	—	—	—	≤ 50° (10°)	—



THE SULLAIR OIL FREE SEAL

The Sullair Oil Free Seal is your assurance the compressor produces the clean air required for your operational needs. All Sullair compressors which meet the ISO standard for Class 0 oil free air ISO 8573-1 carry the Sullair Oil Free Seal.

